




608 Single Input Manometer

APPLICATIONS

- Adjust appliance regulators
- Setting delivery pressures
- Leakage shut-in tests
- Regulator adjustments for pressure and lock-up tests

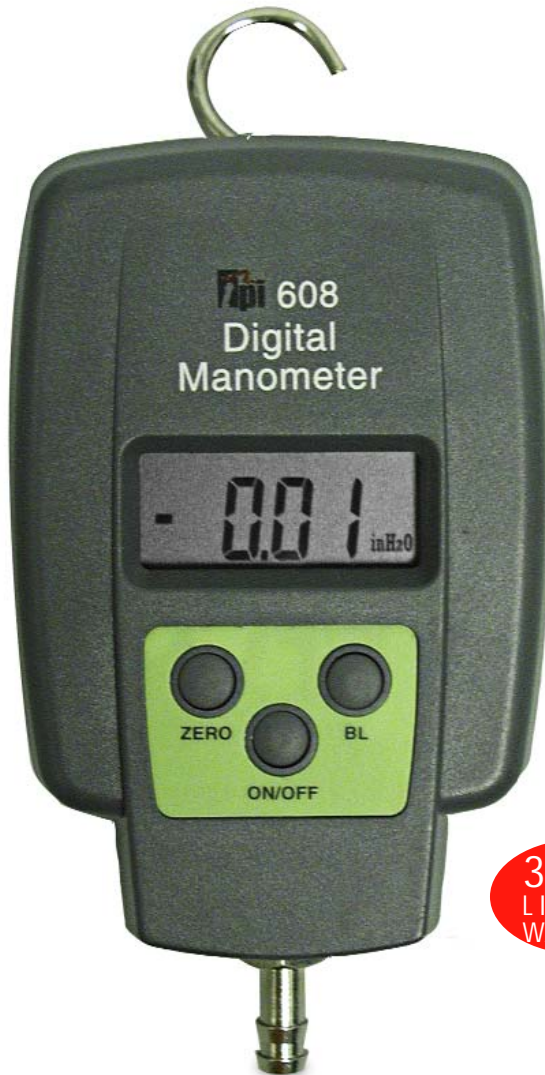

3-YEAR
LIMITED
WARRANTY

Turn over for
technical
information
and accessory
part numbers.

The
Value
Leader™

Features

- Four units of pressure: inH2O, mbar, kPa, and psi
- Temperature compensated
- Auto power off after 20 minutes
- Backlight display
- Wall hook and magnets for no-hand use



608 Single Input Manometer

SPECIFICATIONS

Contents	inH2O	mbar	kPa	psi
Range	±60	±150	±15	±2.175
Resolution	0.01 to 29.9 30.0 to 60.0	0.01 to 29.99 30.0 to 150.0	0.01 to 2.999 3.00 to 15.00	0.001 to 2.175
Accuracy	±1% F.S.	±1% F.S.	±1% F.S.	±1% F.S.
Over pressure	up to 300 mbar (120 H2O, 30kPa, 5.3psi)			
Operating Temp.	-10° to 50°C			
Battery	LR6 9V alkaline			
Battery life	200 hour(typicall)			

TECHNICAL SPECIFICATIONS AND ACCESSORIES

- Digital Multimeters
- Clamp Meters
- Hand-held Oscilloscopes
- Refrigerant & Combustible Gas Leak Detectors
- Temperature Testers
- BNC Coax Cable Connectors
- Test Leads
- Accessories

Test Products International, Inc.

Headquarters:
9615 SW Allen Blvd.
Beaverton, OR 97005
USA
503-520-9197
Fax: 503-520-1225
email:
info@tpi-thevalueleader.com

Test Products International, Ltd.

342 Bronte St. South
Unit 9
Milton, Ontario L9T
5B7
Canada
905-693-8558
Fax: 905-693-0888
email:
info@tpicanada.com

Test Products International UK Ltd.

Longley House, East Park
Crawley, West Sussex
RH10 6AP England
Tel: +44 (0)1293 561212
Fax: +44 (0)1293813465
contactus@tpieurope.com

Distributed By:



To learn about the entire line of TPI products visit:

www.tpi-thevalueleader.com

L 608-0107
Copyright © 2007 Test Products International, Inc.